

CHM-600 5GALLON WASHING, FILLING AND CAPPING MACHINE



Description:

CHM-600 5Gallon Production Line is composed of bottle washing machine, bottle filling machine and capping machine into one body, especially for the production of drinking water of 5 gallons. It is an idea filling line to fill and pack mineral water, distilled water and purified water. The whole line is made of 304 stainless steel, anticorrosive and easy to clean. Siemens electric components are adopted as main components. The world famous product of AirTAC and Mitsubishi are introduced in the pneumatic & control systems. The machine is compactly conformed to small occupation of land and high efficiency and reliable and stable quality and high automation.

Main Technical Parameter:

Model	CHM-600
Capacity	550-600 Bottle per hour (18.9Liter)
Size of barrel	Φ56×Φ270×490mm
Filling range	5Gallons
Filling nozzle	4unit

Bottle loader	4 row
Air pressure	0.5-06MPa
Air consumption	0.4m3/min, according to situation
Voltage	380V, 50-60Hz
Total power	About 12Kw (Filling pump 2.2Kw, washing pump 0.37Kw each, capping motor 0.25Kw, heating washing 9Kw)
Water consumption	4T/H (1.0T/H for rinsing)
Arrange of rinse	Two times of returned non-bacteria water, two times of antiseptic water, two times of non-bacteria water, one time of drop clean
Washing procedure	(1) The first and second procedure : hot water washing; (2) The third and fourth procedure : disinfectant water washing ; (3) The fifth: drip ; (4) The sixth and seventh : recycling washing; (5) The eighth and ninth procedure: pure water washing
Dimension (L type)	4300×1400(1000)×1800
Total weight	1500Kg
Harga	Rp. 585.000.000 (Include PPN 10%)
Indent	2-3 bulan

Configure of QGF-100/300 Barrel rinsing, filling and sealing machine

No.	Item	Model	Origin
1	Body, door, tank, all parts touches water	304 S/S	FACTORY
2	Steel plate, pipe	S=2、1.5、1.2、1m/m	FACTORY
3	PLC	Mitsubishi	JAPAN
4	Cylinder, Pneumatic parts	AirTAC	TAIWAN
5	Water Pump	NanFang	HANGZHOU

6	Contactor	Siemens	GERMAN
7	Conveyor	3m, two lines	FACTORY

Automatic bottle external brusher





Harga Rp. 160.000.000 / unit (Include PPN 10%)

Main technical parameter :

Power supply	380-415VV50HZ 3 Phase
Power of infeed conveyor motor:	1.1Kw
Power of outfeed conveyor motor:	1.5Kw
Working position	4
Barrel size	Suitable for standard 5 gallon bottle
Speed	600 BPH
Weight	600KGS

Automatic bottle inner brusher



Harga Rp. 158.200.000 / unit (Include PPN 10%)

Main technical parameter:

Power supply	380-415V50HZ 3 Phase
Power of infeed conveyor motor:	1.1Kw
Power of outfeed conveyor motor:	1.5Kw
Working position	4
Barrel size	Suitable for standard 3-5 gallon bottle
Speed	600 BPH
Weight	200KGS

Double line of stainless steel conveyor

Size : Single line width 336mm or double lines width 82.6mm*2

Harga :
Rp. 12.700.000 / meter

Steam Type - Label Shrink Machine

Rp. 47.300.000 / unit (Include PPN 10%)

**Termasuk Conveyor 3 meter dengan pengatur
kecepatan**

**Optional - Tanpa Conveyor : Rp.28.000.000 / unit (Include PPN
10%)**



Steam type label shrink machine was generated heat by water. Then the steam will be transferred to inside of shrinking tunnel. Shrinkage will be finished when bottle mouth enter the shrink tunnel.

Power	380V/50Hz, 4kw
Shrink tunnel:	500×180×150mm

Capacity:	100bph-700bph
Machine weight:	50KG

Light Inspection machine


Harga Rp. 2.200.000 / unit



It use for water production process bottle inner sundries checking special facility. It brightness is concentration, easy to handle and maintain ect advantage.

Voltage:	220V , 90w
Applied barrel specification:	5gallon
Capacity:	100bph-900bph
weight:	15KG
overall size:	800*700*150m

Machine drawing reference :

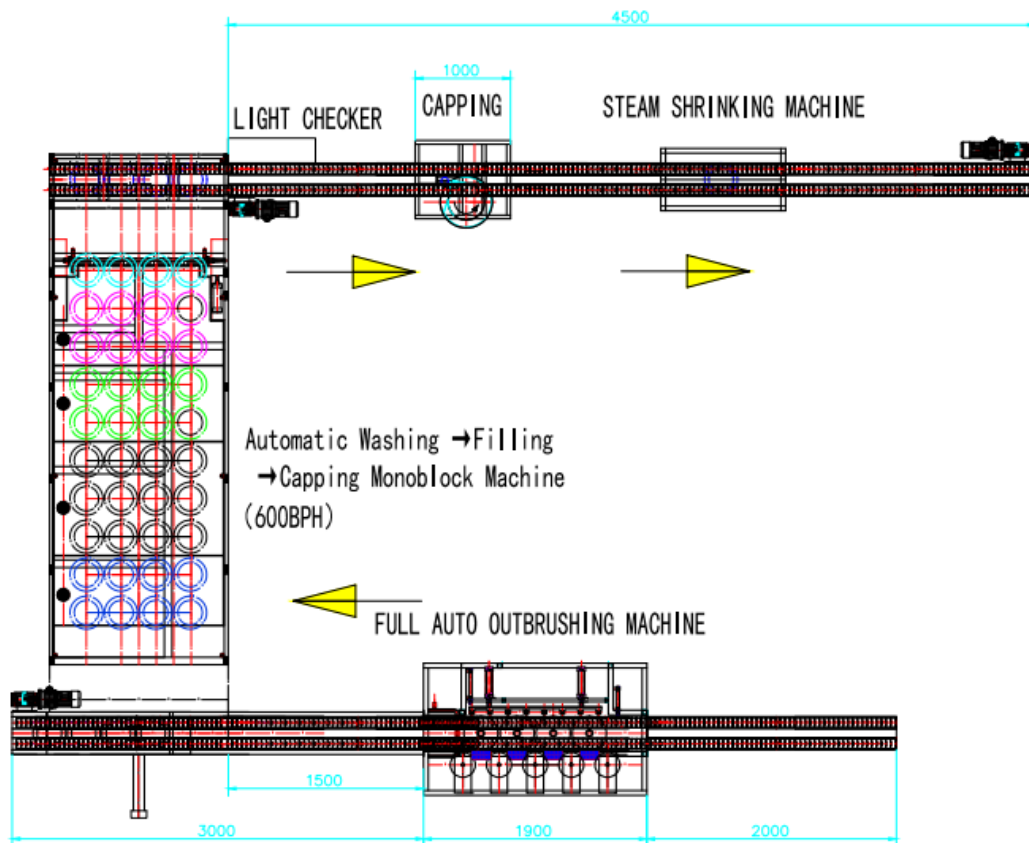

Jl.IR Rais no.81 (Gudang Mesin) Malang, Jawa Timur
Call /Chat WA : 081-252-160-260 Email : info@mesin77.com
Website : www.mesin77.com